

## ZGA42RH Series Ø 42mm

### Motor features:

- Metal gears
- Good reliability
- Sleeve bearing
- Eccentric shaft available

### Typical application:

- Advertisement lamp-case
- Remote-control vehicle lock
- Tie-yarn machine





### Gear Motor Data:

Order number	Voltage	No-load speed	No-load Current	Rated speed	Rated current	RateTorque	Stall Torque	Gearbox Length
	VDC	RPM	AMP	RPM	AMP	Kg.cm	Kg.cm	MM
ZGA42RH-1253-8	12V	662	0.365	503	1.218	0.89	1.33	25.7
ZGA42RH-1253-18	12V	294	0.365	223	1.218	2.00	3.00	25.7
ZGA42RH-1253-22	12V	240	0.365	182	1.218	2.46	3.69	25.7
ZGA42RH-1253-27	12V	196	0.365	148	1.218	3.02	1.58	25.7
ZGA42RH-1253-59	12V	89	0.365	67	1.218	6.67	10.00	29.5
ZGA42RH-1253-73	12V	72	0.365	54	1.218	8.27	12.40	29.5
ZGA42RH-1253-158	12V	33	0.365	25	1.218	17.88	26.82	32.5
ZGA42RH-2460-8	24V	750	0.259	570	1.214	1.68	2.52	25.7
ZGA42RH-2460-18	24V	333	0.259	253	1.214	3.75	5.63	25.7
ZGA42RH-2460-22	24V	272	0.259	206	1.214	4.61	6.92	25.7
ZGA42RH-2460-27	24V	222	0.259	168	1.214	5.65	8.48	25.7
ZGA42RH-2460-59	24V	101	0.259	77	1.214	12.34	18.51	29.5
ZGA42RH-2460-73	24V	82	0.259	62	1.214	15.23	22.85	29.5

FOR YOUR KIND ATTENTION: The data above is only for your informations, for further more specifications & questions, please contact us at [sales@zhengke.cn](mailto:sales@zhengke.cn)

### Appearance Size:

Demension is in :mm

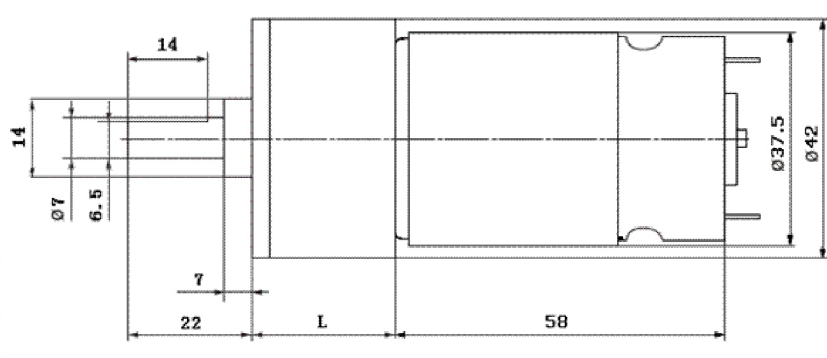

Packing information: 0.40Kg/PC approx,80PCS/CTN,CTN:34x37x32CM