

## ZGB25RPSeries Ø 25mm

### Motor features:

- Eccentric shaft
- Metal gears
- Economy cost
- Good reliability

### Typical application:

- Induction stopcock
- Strongbox
- Automatic valve




### Gear Motor Data:

Part. number	Voltage	No-load speed	No-load Current	Rated speed	Rated current	RateTorque	Stall Torque	Gearbox Length
	VDC	RPM	AMP	RPM	AMP	Kg.cm	Kg.cm	MM
ZGB25RP-1256-11	12V	500	0.03	380	0.20	0.21	0.32	19
ZGB25RP-1256-23	12V	243	0.03	185	0.20	0.44	0.66	19
ZGB25RP-1256-83	12V	67	0.03	51	0.20	1.51	2.26	22
ZGB25RP-1256-184	12V	30	0.03	23	0.20	3.17	4.76	24
ZGB25RP-2456-253	12V	22	0.03	17	0.20	4.14	6.21	26
ZGB25RP-2456-11	24V	427	0.01	325	0.10	0.24	0.36	19
ZGB25RP-2456-23	24V	204	0.01	155	0.10	0.50	0.75	19
ZGB25RP-2456-83	24V	57	0.01	43	0.10	1.72	2.58	22
ZGB25RP-2456-184	24V	26	0.01	19	0.10	3.62	5.43	24
ZGB25RP-2456-253	24V	19	0.01	14	0.10	4.73	7.10	26

FOR YOUR KINDATTENTION: The data above is only for your informations, for further more specifications & questions, please contact us at [sales@zhengke.cn](mailto:sales@zhengke.cn)

### Appearance Size:

Demension is in :mm

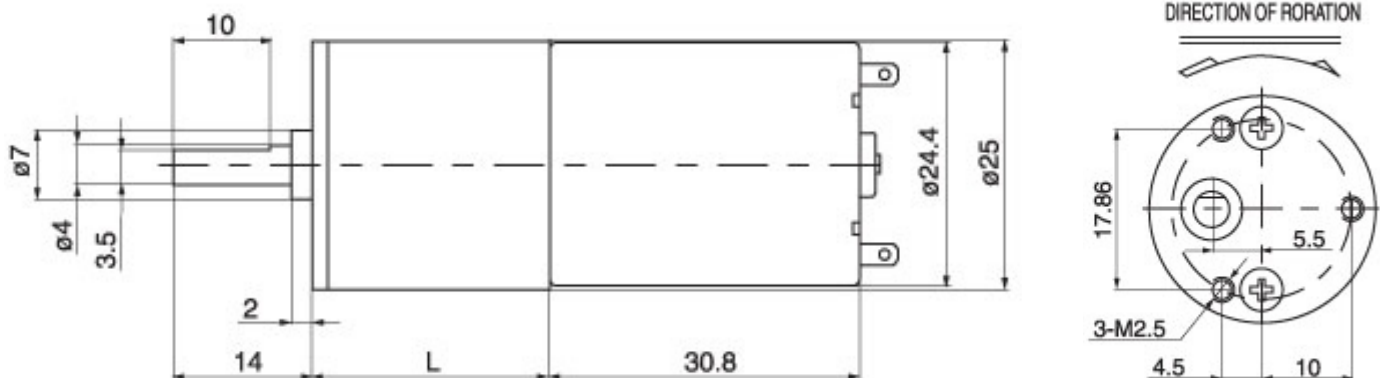

Packing information:0.10Kg/PC approx,100PCS/CTN,CTN:34x37x32CM